

VELOCITY

WIPER BLADE

MULTI ADAPTER



Adapter B1



Adapter M3



Adapter M5


Enjoy it.

HANDLING & CAUTIONS


- 1. Be sure to clean the windshield if it is stained with oil, dirt and grime to ensure the service life of wiper.
- 2. Windshield wiper blade should be replaced when they neither perform as expected, nor provide a sufficient level of safety.
- 3. The recommended replacement duration for maximum performance is six months.
- 4. If wiper blades do not suspend off the windshield, operate the wiper until they reach the center of the windshield, turn off ignition and change the wiper blades.

INSTALLATION GUIDE


Preinstalled Adapter B1



Remove
Preinstalled Adapter B1
Before Installing
Adapter M3 or M5




Hook
(1/2", 3/4")




Adapter B1

Install




Pin & Hood




Adapter M3-PH

Install

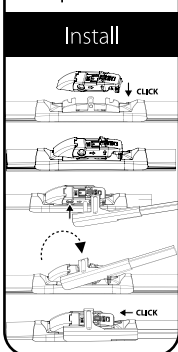


Push Button
(19mm)




Adapter M3-TL

Remove




Install




INSTALLATION GUIDE

Push Button Narrow
(16mm)




Adapter M3-NTL


Remove



Install




Pinch Tab




Adapter M3-PT


Remove



Install




Top Lock



Adapter M5-TLC

Install





Designed and engineered by Blaupunkt Competence Centre

1 511 18 036 17 01 (14")
1 511 18 037 17 01 (16")
1 511 18 038 17 01 (17")
1 511 18 039 17 01 (18")
1 511 18 040 17 01 (19")
1 511 18 041 17 01 (20")
1 511 18 042 17 01 (21")
1 511 18 043 17 01 (22")
1 511 18 044 17 01 (24")
1 511 18 045 17 01 (26")
1 511 18 046 17 01 (28")