

TIF 22 DA - 12V

WARRANTY CARD - Tyre Inflator

4320

Please demand the below portion is filled by the dealer and given to you.

Model: **TIF 22 DA - 12V**

Part Number: **1102048022-001**

Date of Purchase:

Dealer's Stamp:



Dear Customer,

Thank you for buying Blaupunkt. To get yourself familiarized with the features and operation of the unit, we suggest you to read the Operating instruction manual provided along with the unit. This Warranty Card is an assurance that you have purchased the best. Please preserve this card to avail Warranty Service during the unlikely event of any problem.

Warranty:

Your Blaupunkt Tyre Inflator is fully guaranteed against manufacturing defects or material defect for the period of **12 (Twelve) months** from the date of sale, satisfying the terms & conditions given below. Equipment in need of Service should be referred to an authorized Blaupunkt Dealer or Service Center.

Warranty Terms & Conditions:

- Warranty will be entertained only when this card and the original invoice or sale receipt (as proof of date of purchase, model, serial no. and the dealer's name) is presented together with the product requiring attention.
- Warranty does not cover damage to Blaupunkt item caused by accident, misuse, unauthorized repairs, additions and modifications carried out by unauthorized dealers or if tampered in any other manner.
- Warranty will not apply if the type or serial number on the product has been altered, deleted, removed or made illegible.
- Warranty does not cover periodic maintenance or replacement of parts due to normal wear & tear.
- This warranty does not cover problem due to improper installation and setup adjustment.
- We reserve the right to refuse warranty service if the above terms and conditions are violated.
- The extent of this warranty is limited only upto the value of the Blaupunkt equipment under warranty.
- In case of any legal or other disputes the same will be under the Courts in Mumbai jurisdiction.

Blaupunkt India Private Limited

47, Atlanta Society, Nariman Point, Mumbai - 400 021. Maharashtra. India.

Toll Free: 1800 209 6820 | info@blaupunktcar.in | Shop Online at www.blaupunktcar.in


BLAUPUNKT
TYRE INFLATOR
TIF 22 DA - 12V

Suitable for Car, Motorcycle, Bicycle
and other Sports equipment



Enjoy it.

Product Description

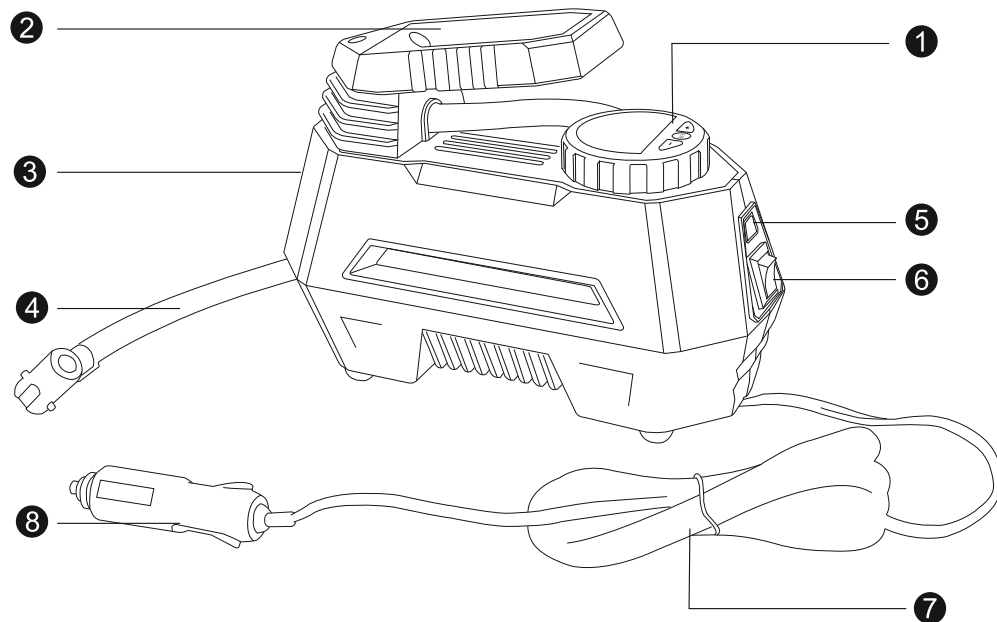

- | | |
|---------------------|--|
| 1. Digital Gauge | 2. Carry Handle |
| 3. LED Lamp | 4. Quick Release Nozzle Inflator Rubber Hose |
| 5. LED lamp turn ON | 6. Inflator ON / OFF Switch |
| 7. Power Cord | 8. Cigarette Lighter Adaptor |

Specification:

- Inflator with Digital Gauge & AutoStop
- Input: DC 12V
- Rated Power: 100W
- Rated Current: 8A
- Max Pressure: 120 PSI / 8.2 BAR
- Cylinder diameter: 22mm
- Max. Duty Cycle: 8 min
- **Recommended for Sedans & Hatchback vehicles**
- Function: Tyre inflator with PRESET & AUTOSTOP
- Additional Function: LED work light
- Power Cord length: 3 meter with cigarette lighter plug.
- Air hose: 50cm rubber hose with quick release valve connector
- Accessories: 2 nozzle adaptors & 1 sports equipment needle nozzle

Instructions:

1. Start the vehicle and insert the cigarette lighter adaptor into the 12V cigarette lighter outlet provided in the vehicle.
2. The device comes with a 3M long Power Cord which makes it convenient to connect the front & back tyres.
3. Attach the Quick Release Nozzle to the valve stem of the tyre.
4. Place the device on a preferably flat surface and set the preferred tyre pressure on the digital dial (Fig 2).
5. Turn on inflator device. Make sure there are no leaks at the point where the quick release nozzle meets the valve stem of the tyre.
6. Once the desired tyre pressure is reached, the unit turns off automatically.




Fig. 1

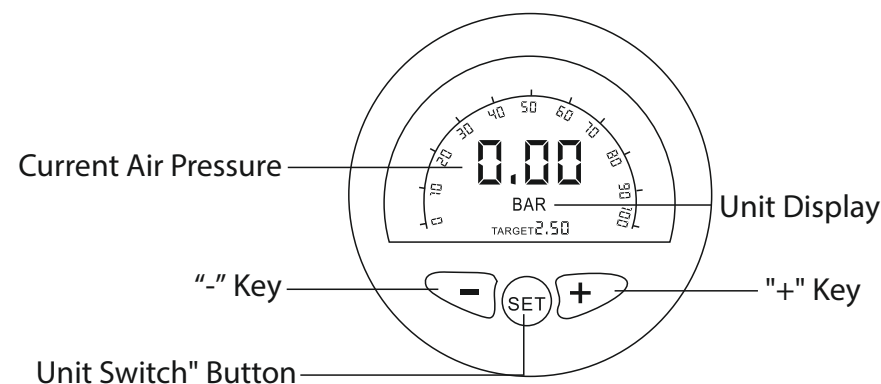


Fig. 2

7. This tyre pressure inflator comes equipped with a LED light that makes it convenient to use at night.
8. This device is designed to work non stop for around 7-8 minutes (typical time required to inflate 13"-16" tyres). It is suggested to not use the device beyond these 7-8 minutes at a stretch. A 2-3 minute interval may be required to improve the efficiency of this device in the long run.




Fig. 3





Product Parameters:

Input Voltage	DC 12V	Power	100W
Power Cord Length	3 Meters	Cylinder Diameter	22MM
MAX Duty Cycle	< 8 min	MAX Air Pressure	120PSI


Helpful Tips:

1. Do NOT keep the device near a heat source
2. Do NOT use this device near flammable liquids or gas source
3. Should the device need attention, please visit an Authorized Service Centre. Any attempt to service the device by unauthorised person will VOID warranty
4. This device is designed to be used with a 12V supply source only. Do NOT attempt to use it with a 24V supply source
5. This device is designed to be used to inflate tires of Sedans and small diameter tyres only.
6. It is normal for the device to get hot after continuous use.
7. It is recommended to use this device to inflate tyres for no longer than it's suggested cycle time at a go.


Accessories: Following accessories are included in the package: 1 qty spare fuse and 3 qty multi - function air inflator nozzles.

**Steps for changing fuse:**

Unscrew the top of the cigarette lighter adaptor



Remove blown fuse & insert spare fuse provided



Screw the top end of the cigarette lighter adaptor to make a tight seal

Troubleshooting Guide

This section covers common problems the user may encounter while using this device.

Nature of problem	Cause and recommended solution
Device not working	Fuse is blown - replace fuse and check device
Device is operating erratically	The quick release valve connector is not connected to the valve stem securely - causing a leak and hence showing erratic readings. Release the connector from the valve stem and reconnect securely
	The preferred tire pressure was not preset correctly and causes the display to blink continuously. Turn off the device, set the preferred tyre pressure and Turn ON device.

TIF 22 DA - 12V

TIF 22 DA - 12V