


LCD TV Product Specification

KTC Model Name: 32FCS Base Model: BCCP-32A Customer Model Name: BLA32HLC02
 Platform Model: M-9216M5C1-ISDB-A Brand: BLAUPUNKT

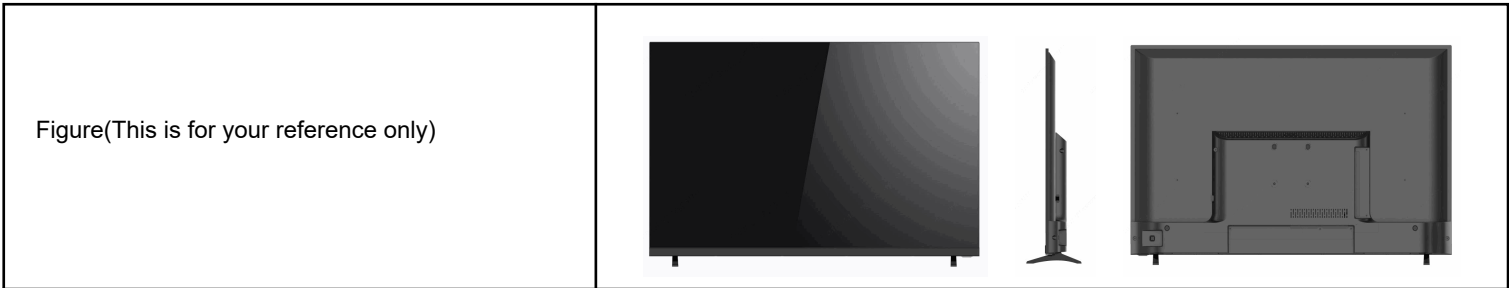

1.Panel spec (The panel parameters will be somewhat different between different OC, please refer to the corresponding panel specification.)

Size	31.51" diagonal
Backlight	DLED direct Type
Maximum resolution	1366×768
Contrast ratio (Typ)	825:1
Response time(Typ)	20ms
Display scale	16:09
Viewing angle(CR>10)	Typ(H:176° , V:176°)
Display Colors	16.7 M
Color Gamut(NTSC)	≥ NTSC 59%
LCM Center Luminance of White	Min:150cd/m2; Typ:180cd/m2
Local dimming	nonsupport
Uniformity of Luminance	≥65%

2.Hardware Information

ATV	PAL M/N; NTSC M
DTV	ISDB
CPU Frame	ARM Cortex-A55/1.45GHz/Quad core
GPU	Mali G31 MP2/Dual-core
RAM(DDR3)	1GB DDR3
ROM(Flash)	8GB
Audio power(Output)	4W+4W (24inch or below 24 inch) , 6W+6W (32 inch or above 32inch)
WIFI(Type)	2R2T
HDMI 1.4 (HDCP 1.4)	2
HDMI 2.0 (HDCP 2.2)	-
USB 2.0	2
USB 3.0	-
VGA	-
AV In	1(mini)
YPbPr In	-
CI	-

PC Audio	-
RJ-45	1
Earphone	-
Audio In	-
Audio Out	-
Video Out	-
SPDIF Out	1 (optical)
Bluetooth(Version)	5.1
Tuner type	Screw head

3. Software Function

Channel list	YES
Channel edit	YES
Picture freezing	NO
MTS/NICAM	YES
Sleep time setting	YES
Teletext	NO
PVR	YES
V_CHIP/Parental Guidance	Parental Guidance
CC(Closed caption)	YES
AD(Audio description)	YES
CI+	NO
DOLBY	YES
HDMI-ARC	YES
HDMI-CEC	YES
HDMI-MHL	NO
Operation system	Android11
OTA	YES
Hotel mode	NO
EPG	YES
TTS(Text to Speech)	NO

4. Structure Information

Base model name	BCCP-32A I shaped plastic stand
Size (without stand) L×W×H	720x68x427mm
Size (with stand) L×W×H	720x167x446mm
Size (carton) L×W×H	789*109*477mm
Net Weight (without stand)	3.8Kg
Net Weight (with stand)	3.9kg
Gross Weight (without stand)	5.1Kg
Gross Weight (with stand)	5.2Kg
Size (Wall hanging)	200x200mm

5.Power Management&Safety&Certificate

Power input	100-240VAc
Fire rating	UL94-HB75
Standby power	≤0.5W
Rated power	55W
Working condition	Temperature: 5°C~40°C humidity: 20%~80% atmosphere: 86KPa~106KPa
Storage condition	Temperature: -20°C~55°C humidity: 20%~80% atmosphere: 86kPa~106kPa

6.Accessory

Stand(Optional)	1PCS
Remote control	1PCS
Instruction	1PCS
Warranty card(Optional)	1PCS
Battery(Optional)	2PCS

Remark 1: The panel parameters will be somewhat different between different panel, please refer to the corresponding panel.
Remark 2: This SPEC is confirmed by KTC and Customer, it will be effective from the dated signed. KTC will control the mass production according to this SPEC and in case all disputes arising from the execution of this agreemen , this SPEC should be prevail.

Signed by PM: _____ Signed by sales Manager: _____

Signed by customer: _____ Date: _____