


PRODUCT DATA SHEET



FR03 LITHIUM ULTIMATE

Ref.no. LI-UL-FR03-V23-09

Date of issue: 1 October, 2023

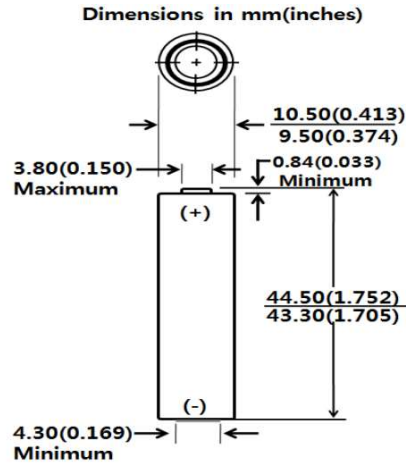




Type Designation	IEC: FR03 / AAA
Made in	China
Chemical System	Lithium and Iron Disulfide battery
Dimensions	Diameter: 9.5–10.5 mm Height: 43.3-44.5mm
Nominal Voltage	1.5 V
Average Weight	7,5 g
Compliant to	IEC 60086-1, IEC 60086-4, EU directive 2006/66/EC
Storage Temp. Range	+10°C (50°F)- +25°C (77°F)
Operating temp Range	-30°C (-22°F)- +60°C (140°F)
Lithium Content	<0.5g
Rated Capacity	1100 mAh

Appearance and terminal


Battery shall be clean and have no dirt, no leakage, and no deformation which may affect their performance and actual use and shall have clearly visible markings.

FR03 LITHIUM ULTIMATE

Discharge curve

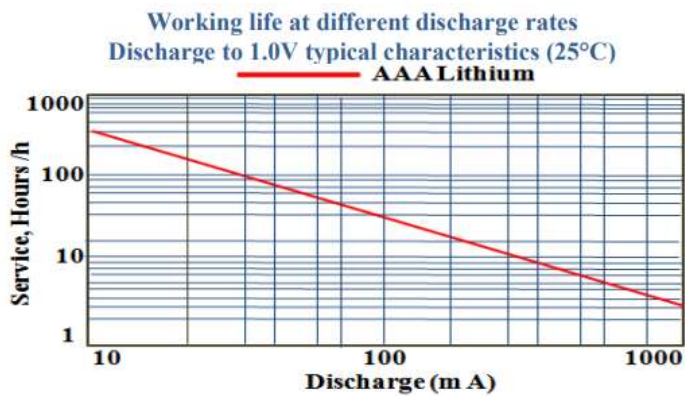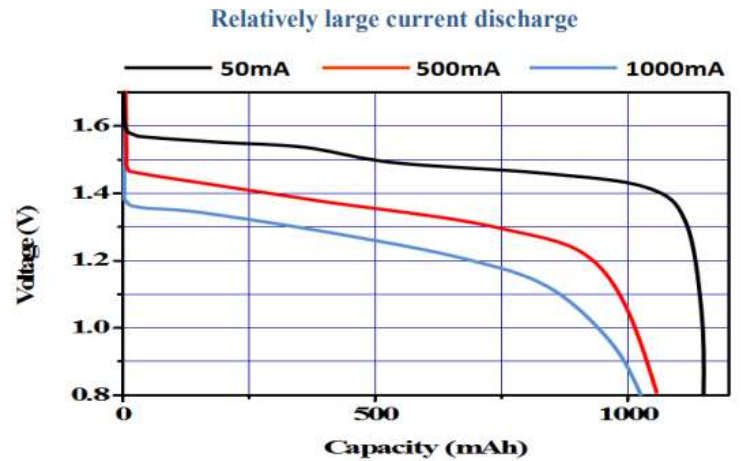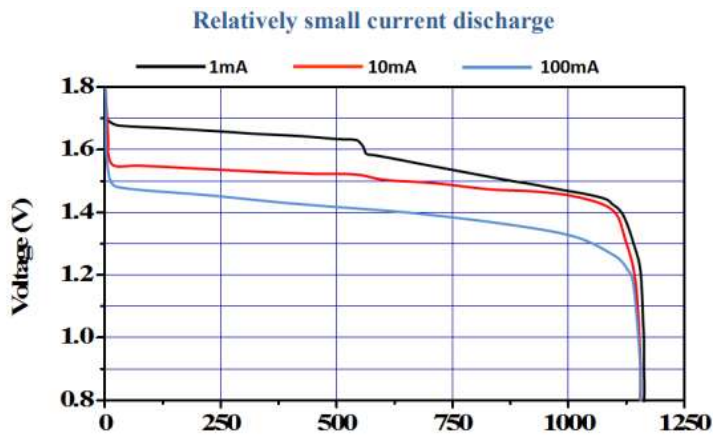

Constant current (50mA) discharge at 25°C

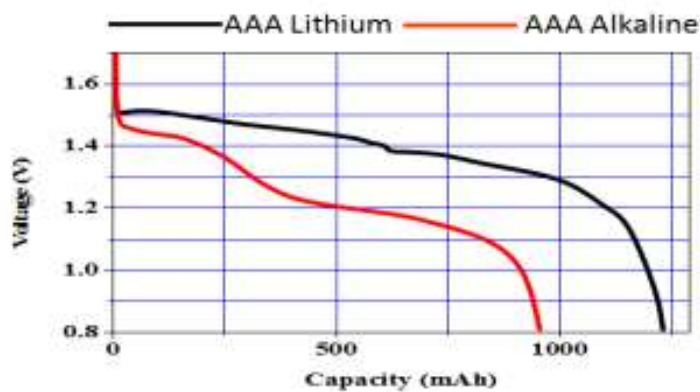

Constant current (50mA) discharge at 25°C

