

# PRODUCT DATA SHEET

## 23A MICRO ALKALINE



Ref.no. AL-M-23A-V23-09

Date of issue: 1 October, 2023





Type Designation	IEC: LRV08 / 23A
Made in	Indonesia
Chemical System	Electrolyte-zinc-manganese dioxide (mercury & cadmium free)
Dimensions	Diameter: 9.8-10.3mm Height: 27.7-28.5mm
Nominal Voltage	12 V
Average Weight	7.9 g
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5, non-dangerous goods regulation EU directive 2006/66/EC
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Storage Temp. Range	+10°C ( 50°F)- +25°C ( 77°F)
Operating temp Range	-20°C ( -4°F)- +55°C ( 131°F)

### Appearance and terminal

Battery shall be clean and have no dirt, no leakage, and no deformation which may affect their performance and actual use and shall have clearly visible markings.

### Discharge curve

Standard Discharge Curve :

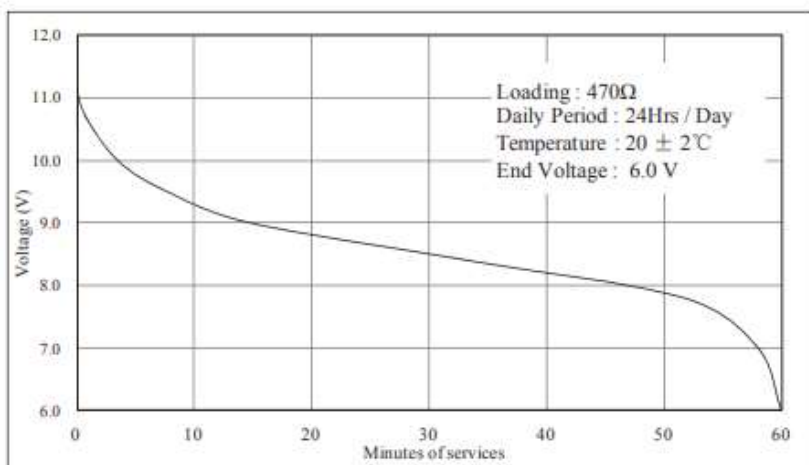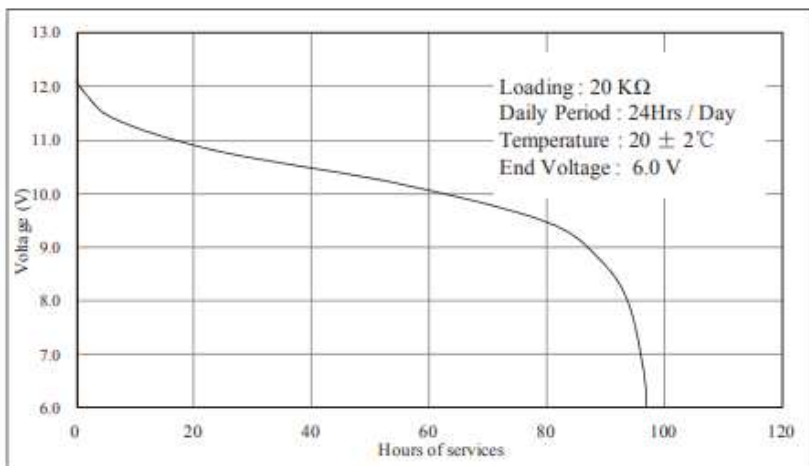

### Temperature characteristics

