

32" PROFESSIONAL MONITOR FOR CCTV

BP-MON-32CCTV




FEATURES

- HD: High-definition: 1920*1080 is higher resolution than ordinary monitors
- Screen when starting up, and the definition speaks with data
- Clarity: Delicate and lifelike, conveying true colors, showing true colors
- Bright: image quality is improved, only for better presentation
- Industrial screen, high brightness, high contrast
- Adopt high-precision standard regulated power supply, specially designed for industrial equipment, support 24 hours × 365 days uninterrupted work
- Using 10-bit image chip processing technology, high-pixel progressive scanning, fine and lifelike picture quality
- Support intelligent 3D noise reduction, afterimage elimination function, dynamic brightness, contrast color optimization technology
- Apply the world's leading liquid crystal drive scheme to accurately restore the front-end signal, with a strong sense of reality
- Liquid crystal has small size, low energy consumption, zero radiation, stable image, no impact on eyes, natural and healthy
- 5 ms extremely fast response, avoiding image smearing during high-speed operation
- Using nanotechnology, the picture is more three-dimensional and transparent

PRODUCT PARAMETERS

Display	
Product model	BP-MON-32CCTV
Screen size	32 inches
Display resolution	1920*1080 (compatible with 3840*2160/30HZ)
Zoom	16:10
Brightness	500cd/m ² (center point, typical value)
Contrast	3000:1
Viewing angle	89/89/89/89 (Typ.)
Response time	5ms (Gray to Gray)
Color depth	16.7M
Function Attributes	
Control method	Panel / Remote
Interface	
Power input	110V/220V 50Hz/60Hz
Input interface	HDMI / VGA / USB / CVBS / Audio input
Output interface	Audio output / Coaxial
Power consumption	
Overall power	50W
Structure	
Color	Black body
Material	Professional fireproof iron shell plastic frame
Dimensions	731*432*85mm, not including foot height 40mm
Installation	Base, wall-mounted (100mm*200mm)
Net/gross weight	3.6kg/5kg
Package weight	22.3kg
Package size	780*110*495mm
Package size	Four in one package 828*553*531mm
Operation environment	
Temperature	most suitable for 20°C
Humidity	10% - 90%RH
Attachment list	
Power cord, warranty card, manual, HDMI cable, base, self-tapping screw	

DIMENSIONS

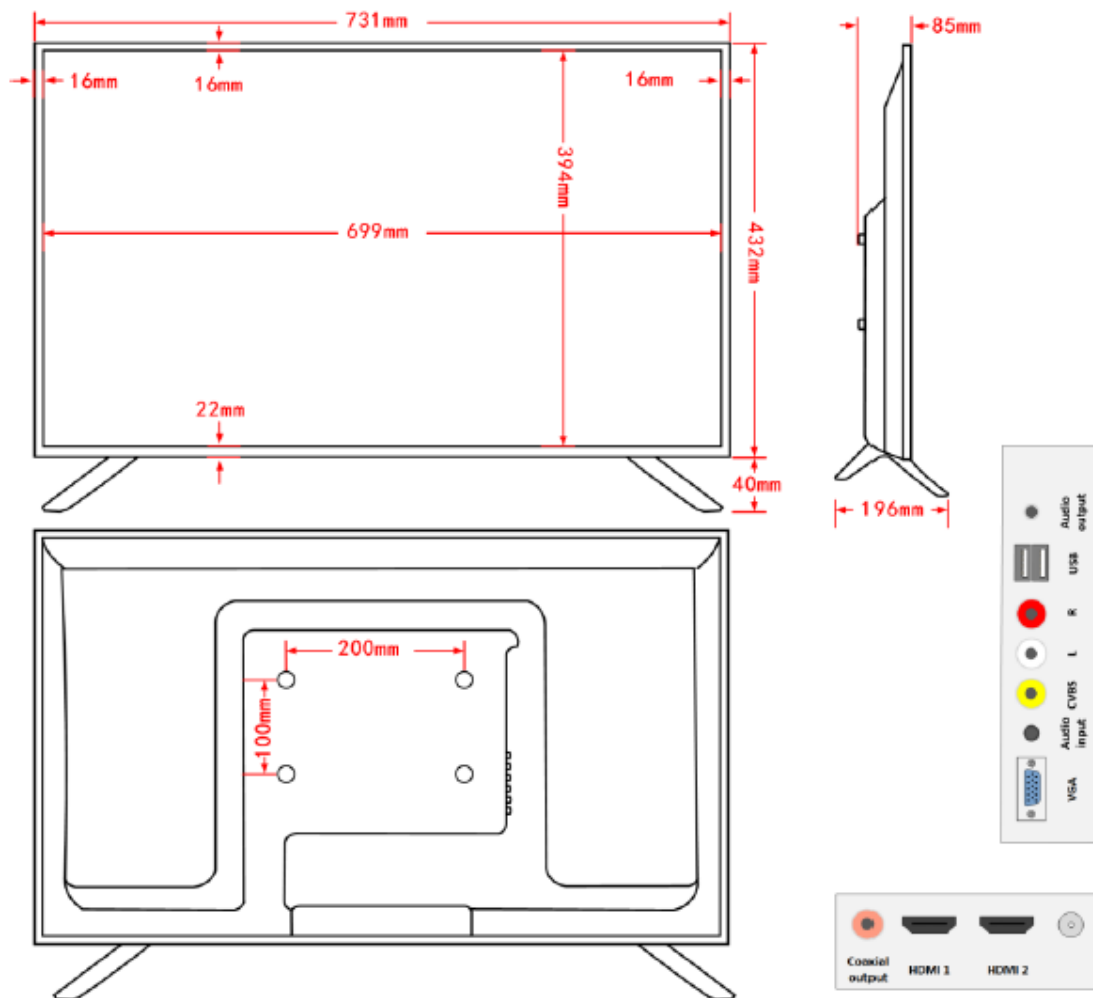

PECAUTIONS

- Be careful when transporting and handling;
- Do not use it in corrosive, flammable and explosive places;
- In order to avoid the danger of electric shock, please cut off the power supply during installation, commissioning and moving;
- Do not install it near the heat source, so as not to overheat the product and damage the product;
- Ensure that all connectors are connected correctly and reliably;
- Do not open the cover of the product without permission.