

43" PROFESSIONAL MONITOR FOR CCTV

BP-MON-43CCTV




FEATURES

- HD: High-definition: 3840*2160 is higher resolution than ordinary monitors
- Screen when starting up, and the definition speaks with data
- Clarity: Delicate and lifelike, conveying true colors, showing true colors
- Bright: image quality is improved, only for better presentation
- Industrial screen, high brightness, high contrast
- Adopt high-precision standard regulated power supply, specially designed for industrial equipment, support 24 hours × 365 days uninterrupted work
- Using 10-bit image chip processing technology, high-pixel progressive scanning, fine and lifelike picture quality
- Support intelligent 3D noise reduction, afterimage elimination function, dynamic brightness, contrast color optimization technology
- Apply the world's leading liquid crystal drive scheme to accurately restore the front-end signal, with a strong sense of reality
- Liquid crystal has small size, low energy consumption, zero radiation, stable image, no impact on eyes, natural and healthy
- 8.5 ms extremely fast response, avoiding image smearing during high-speed operation
- Using nanotechnology, the picture is more three-dimensional and transparent

PRODUCT PARAMETERS

Display	
Product model	BP-MON-43CCVT
Screen size	43 inch
Display resolution	3840*2160
Zoom	16:9
Brightness	450 cd/ m ² (center point, typical value)
Contrast	3000:1
Viewing angle	160 degrees/170 degrees
Response time	8.5ms (Gray to Gray)
Color depth	16.7M
Function Attributes	
Control method	Panel / Remote
Interface	
Power input	110V/220V 50Hz/60Hz
Input interface	HDMI / VGA / USB / DVI / BNC / 232 serial port
Output port	232 serial port
Power consumption	
Overall power	97W
Structure	
Color	Black body
Material	Professional fireproof iron shell plastic frame
Dimensions	968 * 561 * 88mm not including foot height 50
Installation	Base, wall-mounted (100mm*200mm)
Net/gross weight	6.5 kg / 8.3 kg
Package weight	18.5 kg
Package size	1050 * 645 * 135mm
Package size	Two in one package 1070 * 674 * 286mm
Operation environment	
Temperature	most suitable for 20°C
Humidity	10% - 90%RH
Attachment list	
Power cord, warranty card, manual, HDMI cable (gift), base, self-tapping screw PA4*12mm (one bag)	

DIMENSIONS

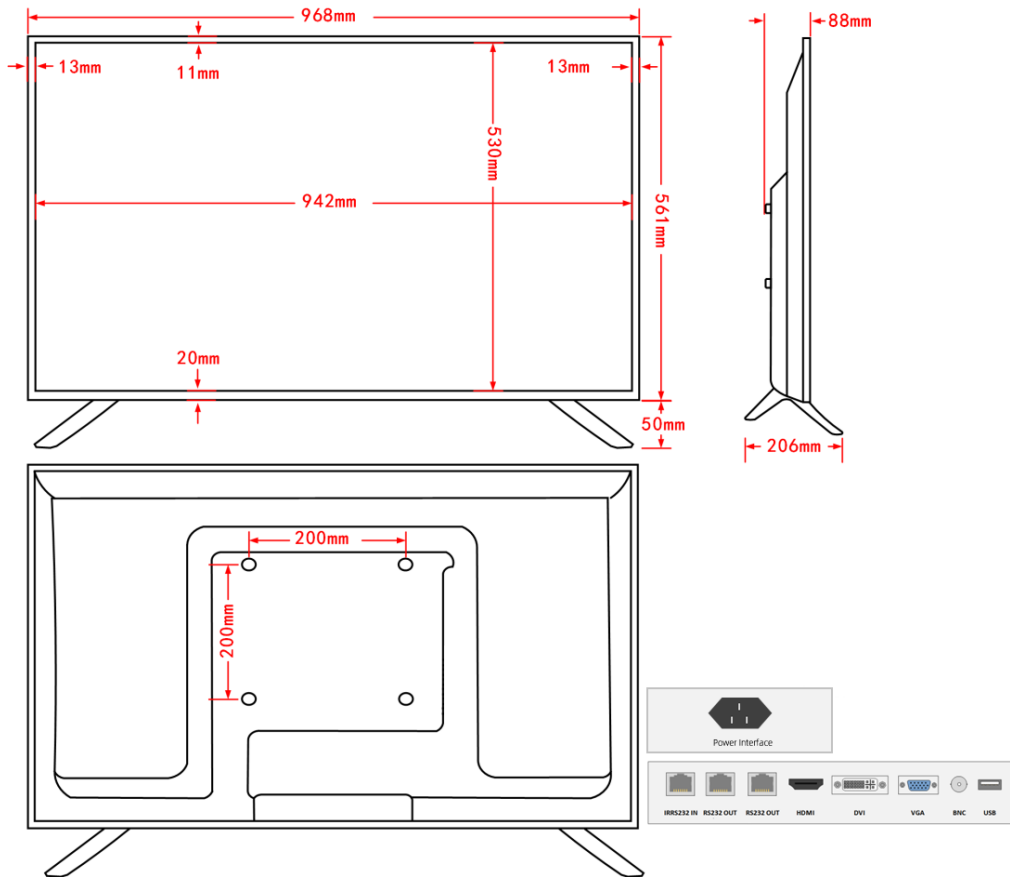

PECAUTIONS

- Handle with care when transporting and handling;
- Do not use in places with corrosion, flammable and explosive;
- In order to avoid the danger of electric shock, please cut off the power supply during installation, commissioning and moving;
- Do not install near the heat source, so as not to overheat the product and damage the product;
- Make sure that all connectors are connected correctly and reliably;
- Do not open the cover of the product without permission.