

7-INCH INDOOR MONITOR

BP-VDP-IS724-W



OVERVIEW

This product based on TCP/IP transmission protocol, is the main device for the H series video door phone system, it supports video phone, defence area setting and picture pushing. Details of the device are as follows:


FEATURES

- 7" capacitive touch screen
- Support 24V non-standard PoE switch (power with 4/5 & 7/8)
- Support connection to doorbell and mini outdoor station
- Support extendable elevator-reserve service
- Support real time surveillance to outdoor/villa station, IP camera
- Support receiving message from management centre
- Support multi - indoor monitor in one apartment, synchronizing arm/disarm
- Support video chat between residents and visitors/guard unit
- Support voice intercom between residents in the same community and other indoor monitors in the same flat
- Support 7 standard defence areas + 1 IO defence areas or 8 IO defences areas


SPECIFICATION

Model: BP-VDP-IS724-W	
Working Parameter	
Working Voltage	DC 24V
Device Quiescent Current	≤80mA
Device Working Current	≤ 200 mA
Screen Size	7 inch
Resolution	1024 × 600
Appearance Dimension	200 × 130 × 14.9mm (L × W × D)
Environment Temp.	-10°C ~ +55°C
Call Waiting	30s
Call Duration	120s
Surveillance Duration	30s


PRODUCT DIAGRAM

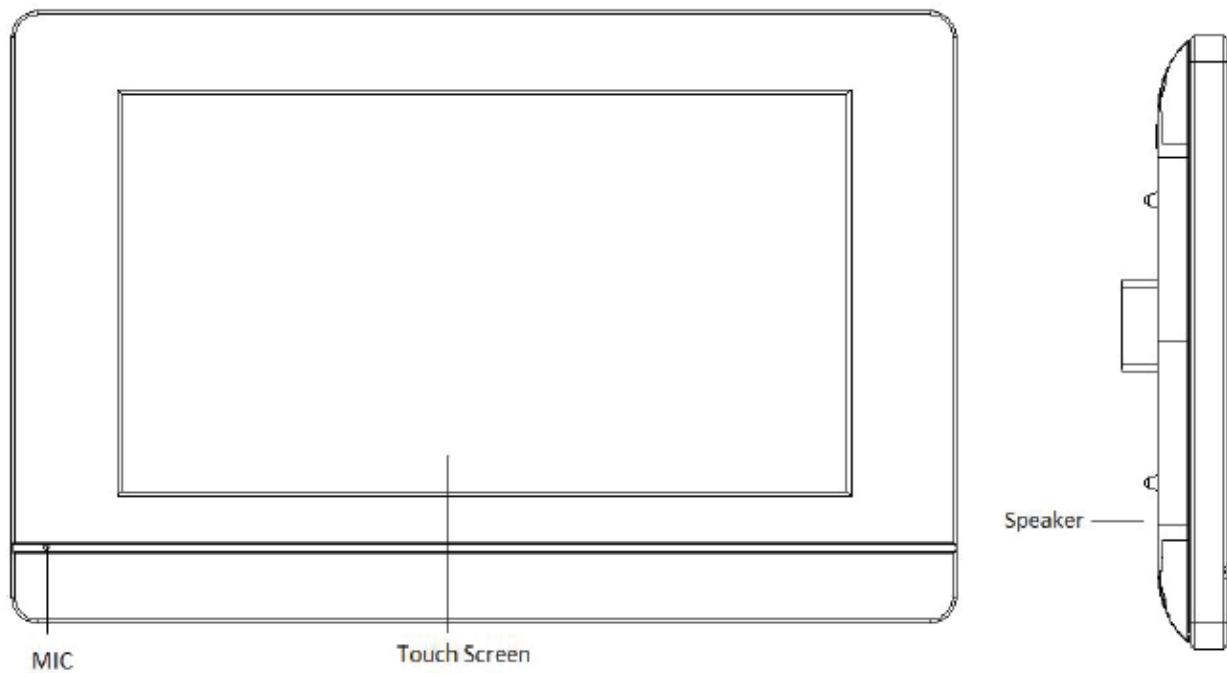

PRODUCT DIMENSIONS

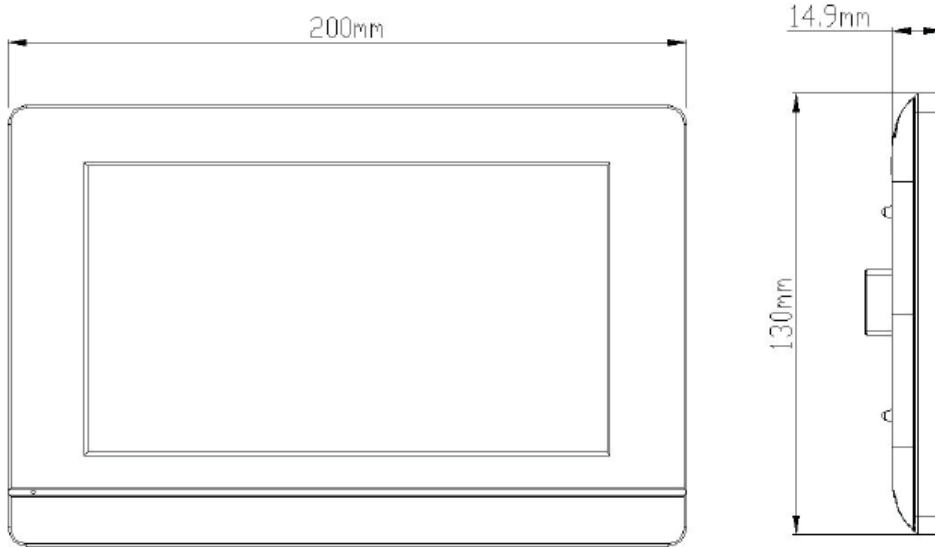

INTERFACE INTRODUCTION

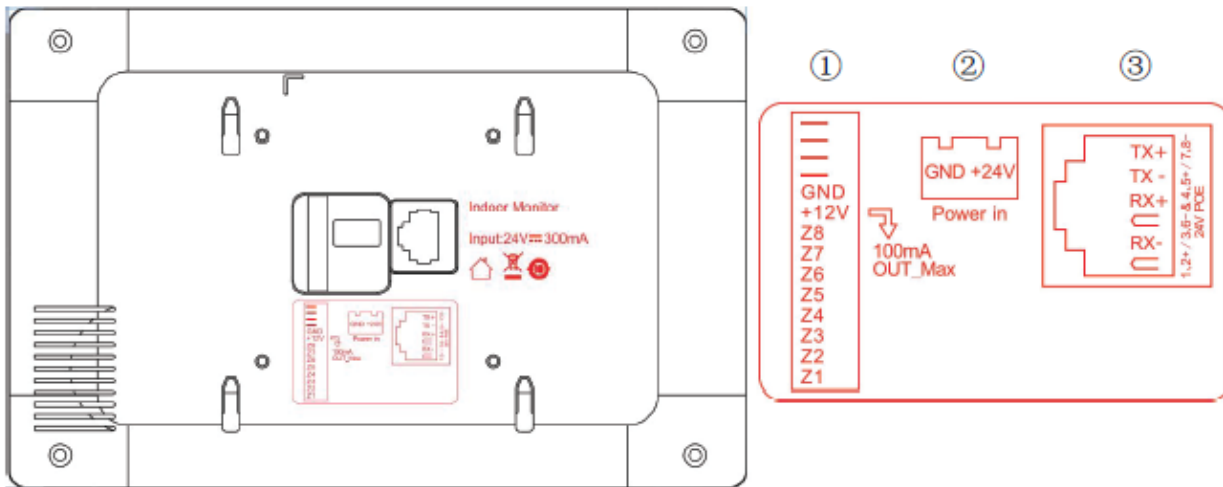

Number①

GND、+12V: Defense zone detector power terminals (current \leq 100mA)

Z8: doorbell function as default.

Z7 to Z1: standard defense area interface, support normal open/close security module.

Number②

External power input: DC 24 V.

Number③

Network Port (24V non-standard PoE switch).