



SILK DOME TWEETER **BGT 125**



Enjoy it.

Operating and Installation Instructions

CAUTIONS

Thorough system planning is crucial to maximize the device's performance and enhance road safety. Carefully plan your installation to maintain the system's performance reliability. Seek assistance from an authorized Blaupunkt dealer for installation or repairs. Prior to using the device for the first time, diligently review the manual.

Safety Notes

Please adhere to the following safety guidelines during installation and wiring connections:-

- Disconnect the negative terminal of the battery and refer to the safety notes provided by the vehicle manufacturer.
- Ensure that the hole positions are located away from vehicle components to prevent any damage during drilling.
- Ensure that the cross-section of the cable is not less than 2.5mm² if the positive and negative cables are excessively long.
- Incorrect installation may lead to device malfunction or impairment of the car's sound system.

Installation and Connection Instructions

- Choose a dry and well-ventilated location for installing the device.
- Do not install the device in overly exposed locations such as the rear shelf or rear seat.
- The installation location should be suitable for screw holes and provide stable ground support.

Disclaimer

- Under no circumstances shall Blaupunkt be held liable for any direct, indirect punitive, incidental, or special consequential damages, whether related to property or life, arising out of or connected with the use or misuse of our products, including but not limited to issues of improper storage.
- US & Canada: This product is not intended for sale in the United States and Canada. If acquired in the U.S or Canada, it is obtained on an "as-is" basis. No warranty, whether express or implied, is provided in the U.S and Canada.

Disposal Notes




Do not dispose of your old unit in the household trash!

Use the return and collection systems available to dispose of the old device.

This manual may be updated from time to time without any notice.
Visit www.blaupunkt.com for more info.

SPECIFICATIONS

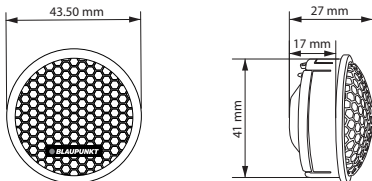

Pair of 1.7" silk dome tweeter including mounting hardware

- Max. Power Handling : 30W
- Normal Output Power (RMS) : 15W
- Impedance : 4Ω
- Frequency Response : 2kHz-20kHz
- Sensitivity : 87 +/- 3dB
- Mounting Hole Diameter : 41mm
- Voice Coil : 25mm
- Surround : Silk
- Cone Material : Silk

Accessories



2x Capacitors



2x Watchbands



2x Flush Mounting Rings



2x Angled Supports




2x Cables




4x Screws

INSTALLATION

Surface Mounting

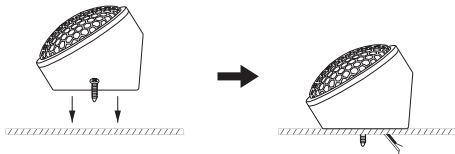

Flush Mounting



TROUBLESHOOTING

If any of the following problems occur, please resort to Troubleshooting for the possible solutions. Consult Blaupunkt authorized dealer if the problems persist.

Problems	Possible Causes	Solutions
Tweeter does not work	Incorrect or loose wiring connection.	Ensure proper wiring connections of tweeter.
	Fraying or broken cables.	Repair or replace if the cables are damaged.
	Tweeter is damaged.	Replace with a new tweeter.
Distorted and hissing sound	Voice coil or tweeter cone is damaged.	Replace with a new tweeter.

WIRING DIAGRAM

