



ROME 1140M RM

ROME 1140A RM

ROME 1156M RM

ROME 1156A RM

ROME 1156M TYAL

ROME 1156A TYAL



Enjoy it.

Operating and Installation Instructions

CAUTIONS

Safety Notes

This device has been manufactured according to established safety guidelines. However, dangers may still occur if the safety notes in this manual is not observed. This manual is intended to familiarize the user with the important functions of the device. Read this carefully, prior to using the product. Keep this manual in an easily accessible location. In addition, do observe the instructions of the other devices used in conjunction with this device. Do not dismantle or modify the device. Installation and repairs, if necessary, should be performed by a specialist. Unauthorized installation, disassembly, or modification may result in unit malfunctions and void of warranty.

Attention

- The User Interface (UI) displayed in the manual is sourced from various Head Unit models. This approach aims to enhance user experience by providing guidance that caters to navigating different monitors.
- Select a mounting location that ensures the driver's visibility is not obstructed in any circumstances and prevents injuries to drivers and passengers during emergency braking or accidents.
- Prior to fitting the unit into the mount, verify proper wire connections and ensure the unit functions correctly. Refrain from touching the unit during a lightning flash, as there is a risk of electric shock.
- Avoid applying or dropping any pressure on the front panel of your video monitor.
- Exercise caution to avoid damaging vehicle components while drilling holes for the mount.
- This unit is suitable for car rooftop placement. Vehicles may vary from the provided description; consult an authorized Blaupunkt dealer or the vehicle's manufacturer if the information does not align with your specific installation requirements.
- Avoid overloading the cigarette lighter charger with more than one device at a time.


- Exercise special care when dealing with liquids in your vehicle. In the event of any spills on the equipment, safely pull over to the side of the road and switch off the ignition to disconnect or gently wipe the affected areas with a towel. Refrain from using the equipment until all liquids have either dried up naturally or until a qualified technician at a service center has inspected the equipment. Failure to do so may lead to significant harm or hazards.
- The device is designed for 12V vehicle and it does not record video.
- Do not install this unit near a heater outlet. Avoid covering or obstructing heater ducts or vents, as this may pose a fire hazard or risk of electric shock.
- Use only lightly dampened cloth to cleanse the screen, ensuring it is dampened with purified water. Before wiping, ensure excess water is wrung out from the cloth. Avoid the use of cleaners or chemicals on the screen. In many instances, a dry cloth will suffice for cleaning purposes.
- Extended periods of monitor use without the engine running may result in draining the vehicle's battery charge.
- Exclusively use the parts included with the unit.

Disclaimer

- Blaupunkt is not liable for any loss or damage caused or resulting from unauthorized disassembly or modification to the product.
- Under no circumstances shall Blaupunkt be held liable for any direct, indirect, punitive, incidental, or special consequential damages, whether related to property or life, arising out of or connected with the use or misuse of our products, including but not limited to issues of improper storage.
- USA & CANADA: This product is not intended for sale in the United States and Canada. If acquired in the U.S. or Canada, it is obtained on an "as-is" basis. No warranty, whether express or implied, is provided in the U.S. and Canada.

This manual may be updated from time to time without any notice. Visit www.blaupunkt.com for more info.


KEY FUNCTION



Roof monitor bottom cover
On/off button / Function button
Micro SD slot
USB slot
LCD display

Remote for ROME 1140M RM ROME 1156M RM

Power On/Off/Screen saver
Volume -
OK
Left
Return
Home
Mouse Controller
Previous
Next
Mute
Volume +
Up
Right
Down
Setting



Remote for ROME 1140A RM ROME 1156A RM ROME 1156A TYAL

Power On/Off
Monitor up
Page up
Left
Page down
Return
Previous
Home
Next
Delete
Monitor down
OK
Right
Setting
Volume +
Volume -
Mouse controller On/Off




Remote for ROME 1156M TYAL

Power On/Off
Play/Pause
Page up
Left
Page down
Return
Previous
Home
Next
Delete
Mouse controller On/Off
OK
Right
Setting
Volume +
Volume -
Mute



SPECIFICATION


Screen size	14 inch (Rome 1140 x XX) / 15.6inch (Rome 1156x XX)
Screen Type	Touch Screen
Display mode	16:9
Resolution	1920 x 1080 (RGB)
View angle	Left/Right/Up/Down : 85° (Opens up to 110°)
Operating System	Android 9.0
Bluetooth	Supported
RAM Memory	4G DDR3
Flash memory	32G
Audio format	MPEG/MP3/WMA
Video format	AVI/MKV/MP4/MOV/RMVB
Video Resolution	Support 1080P
Picture format	JPG/BMP/JPEG/GIF
Micro SD Slot	2x support up to 128GB
USB2.0 Slot	2x support up to 128GB
HDMI Input	1x rear video-in
Atmosphere Light	Support multicolour
Speaker	2 x 2W
Operation Temperature	-10°C ~ 55°C
Storage Temperature	20°C ~ 60°C
Power supply	DC12V
Input & Output	1x video-in, 1x audio-out
Accessories	1x Wire Harness, 4x Screws, 1x Remote Control, 3x pairs of coloured cover

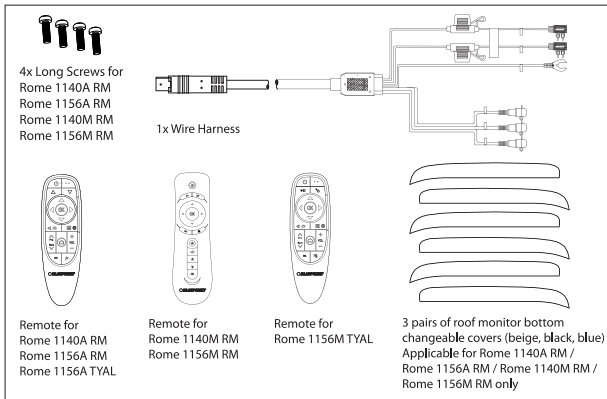


INSTALLATION

Compatible with
Rome 1156A TYAL
Rome 1156M TYAL
Made for Toyota Alphard (year 2018 - 2023)


Remove the original car roof monitor.




2. Install the iron plate to the crossboarm of the car by screwing these 4 holes.



3. Pull the cables out from wire hole of the iron plate.




4. Screw the entire device to the iron plate.



INSTALLATION

Compatible with
ROME 1140M RM
ROME 1140A RM
ROME 1156M RM
ROME 1156A RM


1. Separate the iron plate from main unit by removing the 4 screws




2. Mark the position of the unit in the middle with similar place measurement on each side. Cut the marked ceiling carpet out.



3. Pull the cable out from wire hole of the iron plate before screwing the entire device to the rooftop.



4. Choose suitable size of screws to install the iron plate on the rooftop.

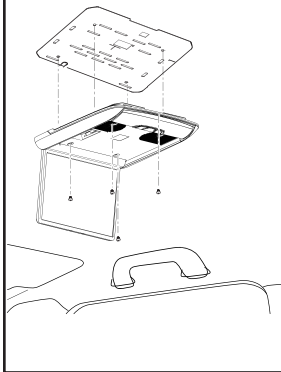

Compatible with
ROME 1140M RM
ROME 1140A RM
ROME 1156M RM
ROME 1156A RM

1. Remove the existing monitor's cover. Ensure to pull out the sides of the cover simultaneously to prevent damage.



2. Select the preferred changeable cover colours and align the buckle on the left cover with the left groove of the monitor then attach the rest of the cover on the monitor carefully.



3. Ensure no gaps at between the edges of the cover and the monitor by flattening the cover.



Home Page




Function Setting

• Press **Settings** to adjust the device settings.



Music Playback


• Select **Music** icon on the Home Page to playback media that are connected via local device SD card or USB.



OPERATIONS


Video Playback

- Select **Video** icon on the Home Page to playback media that are connected via local device, SD card or USB.



Documents Manager

- Select **File Manager** icon to manage documents playback media that are connect via local device, SD card or USB.



HDMI Video Input

- Select **Video Input** icon to watch videos that are connected via HDMI or AV video input.




Mirrorlink

- Select **Wireless Display** icon to setup mirrorlink from the monitor of the smartphone. (Subject to smartphone setting support)




- Android : Active Wireless Miracast by connecting smartphone's Wi-Fi to the monitor's Wi-Fi.
- Apple : Ensure to connect the monitor to the smartphone's hotspot. Then open Airplay to connect to CastE8t.



Other Applications

- Select **Apps** icon to manage other applications and settings.


WIRING DIAGRAM

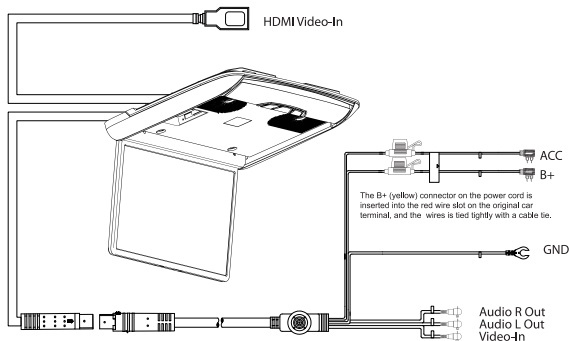

TROUBLESHOOTING

If any of the following problems occur, please refer to the Troubleshooting section for potential solutions. If the problem persists, seek assistance from an authorized Blaupunkt dealer.

Problem	Solution
Display monitor / car radio does not show surround view.	Restart the display monitor / car radio.
Surround view does not show even after restarting the display monitor/ car radio.	Examine if the power supplies is properly connected.
Surround view does not show even though power supplies of the reverse light or the rear car plate light is properly connected.	Examine if the power supply cables is damaged. Repair/replace if the cables are damaged.



Blaupunkt Car Entertainment - Asia Pacific Competence Centre

RO

ROME 1140M RM

1 105 24 003 33 01

ROME 1140A RM

1 105 24 004 33 01

ROME 1156M RM

1 105 24 005 33 01

ROME 1156A RM

1 105 24 006 33 01

ROME 1156M TYAL

1 105 24 007 33 01

ROME 1156A TYAL

1 105 24 008 33 01