


Wireless intelligent remote controller BP-WRP4B-868




Technical Parameter

- Using range: $\leq 100\text{m}$ (in the open place)
- When the remote-control distance is insufficient, please hang the remote-control key ring vertically and press the remote-control button.
- Frequency: 868MHz
- Working voltage: 3V (1*CR2450 button battery)
- Quiescent current: $\leq 3\mu\text{A}$
- Working current: $\leq 30\text{mA}$
- Prompt information: the blue light is on, indicating that the host has received a response; the red light is on, indicating that the communication has failed.
- Working environment: $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Color: white


Using:




1. For away arm, press the key **AWAY** for 2 seconds.



2. For at home arm, press the key **HOME** for 2 seconds.



3. For disarm, press the key **DISARM** for 2 seconds.

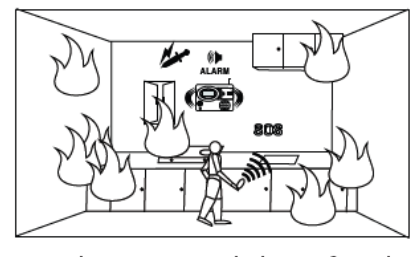

4. The emergency help is safe and convert, press key **HELP** for 3 to 4 seconds to reliaze this function.