

## MINI OUTDOOR STATION

### BP-VDP-OS124-B



### OVERVIEW

The product is the mini outdoor station. By using standard CAT5 cables, it makes visual intercom call to indoor monitor and guard station possible. Besides, it supports IC access control.


### FEATURES

- Support IC card
- Support calling to indoor monitor and guard unit
- Adjustable unlock time
- Door status detection, and unlock state timeout alarm
- Support normal open/close unlock output
- Support online update


## SPECIFICATION

Model: BP-VDP-OS124-B	
Working Parameter	
Working Voltage	DC 24V
Working Current	≤130mA
Static Current	≤ 60
Working Temperature	-20°C ~ 55°C
Storage Temperature	-40°C ~ 70°C
Dimension (H/W/D)	120 × 194 × 44.7mm
Camera	
Type	CMOS
Pixel	0.3 Mega
View Angle	Diagonal 95°
Min. Illumination	0 lux
Focal Length	2.2mm
Fill-in Light Type	White
Adjustable Angle	Up/down/left/right 12°


## PRODUCT DIAGRAM

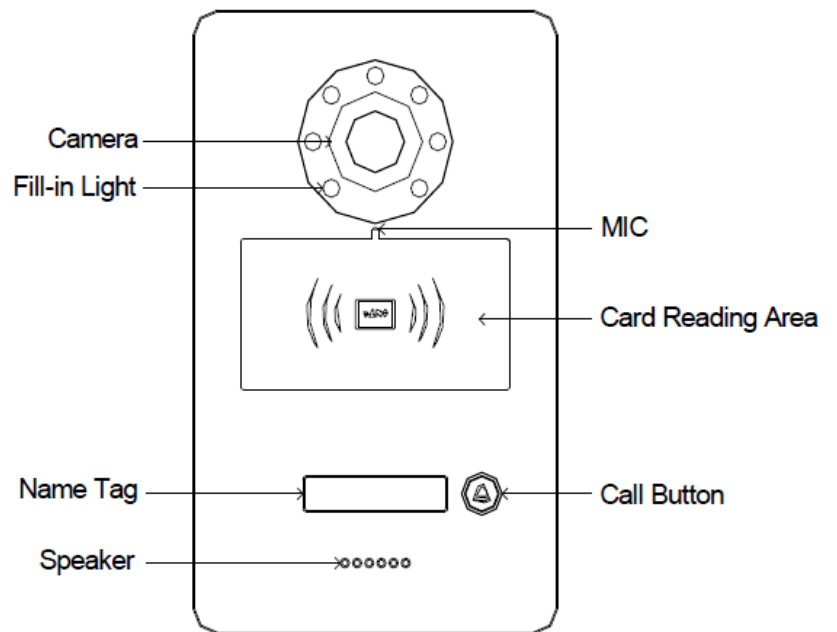

## PRODUCT DIMENSIONS

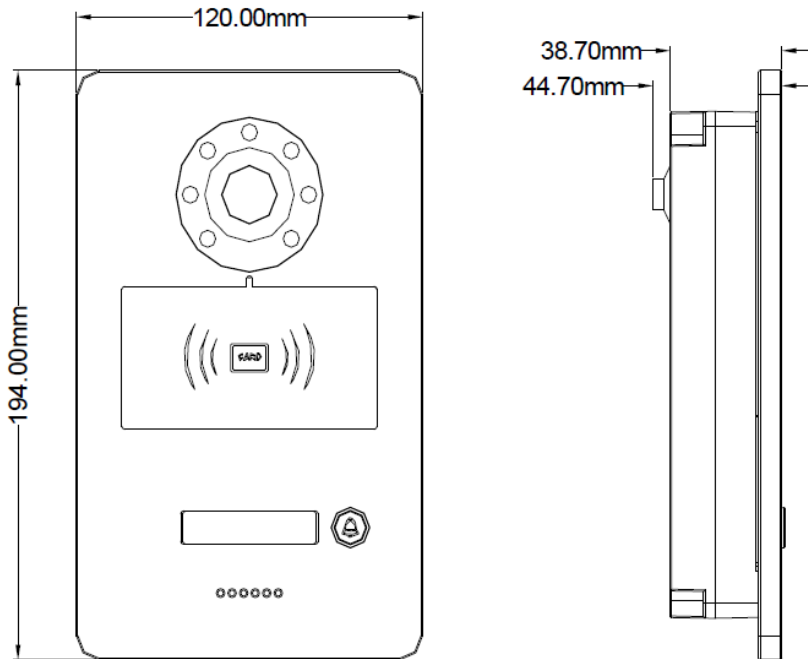

## INTERFACE INTRODUCTION

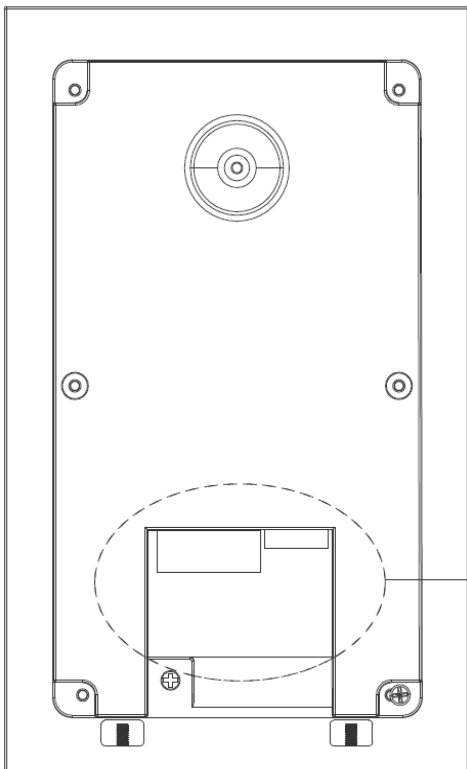

①

GND, DC+: independent power supply interface;

②

GS, GS-GND: door status detection interface;

NO, COM, NC: normal open/close interface;

③

RJ45: cable interface, connecting non-standard 24V POE switch.

