

VILLA OUTDOOR STATION

BP-VDP-OS148-G



OVERVIEW

The product is the single button outdoor station. By using standard CAT5 cables, it makes visual intercom call to guard station possible. Besides, it supports IC access control.


FEATURES

- Support IC card
- Support calling to guard unit
- Adjustable unlock time
- Door status detection, and unlock state timeout alarm
- Support normal open/close unlock output
- Support online update


SPECIFICATION

Model: BP-VDP-OS148-G	
Working Parameter	
Working Voltage	DC 24V/POE 48V
Working Current	130mA DC24V/60mA 48VPOE
Static Current	≤ 65mA 24V/45mA 48VPoE
Working Temperature	-25°C ~ 55°C
Storage Temperature	-40°C ~ 70°C
Dimension (H/W/D)	168 × 86 × 33.5mm
Camera	
Type	CMOS
Pixel	2MP
View Angle	Diagonal 78°
Relative illumination	48%
Focal Length	2.2mm
Fill-in Light Type	White


PRODUCT DIAGRAM

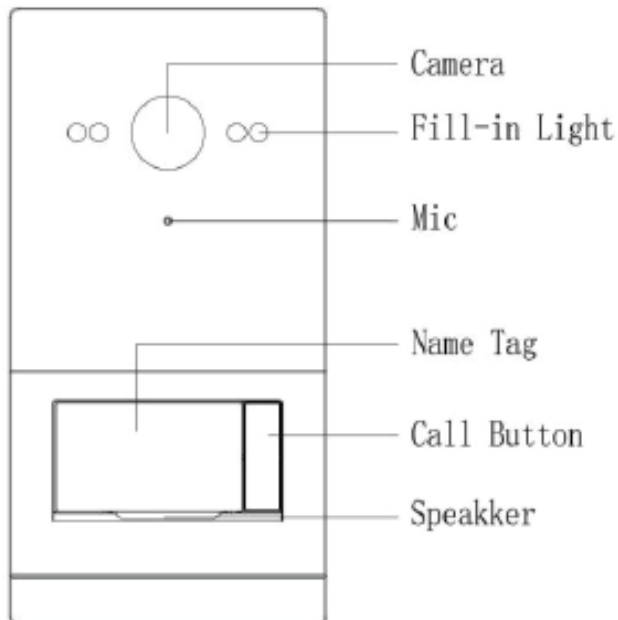

PRODUCT DIMENSIONS

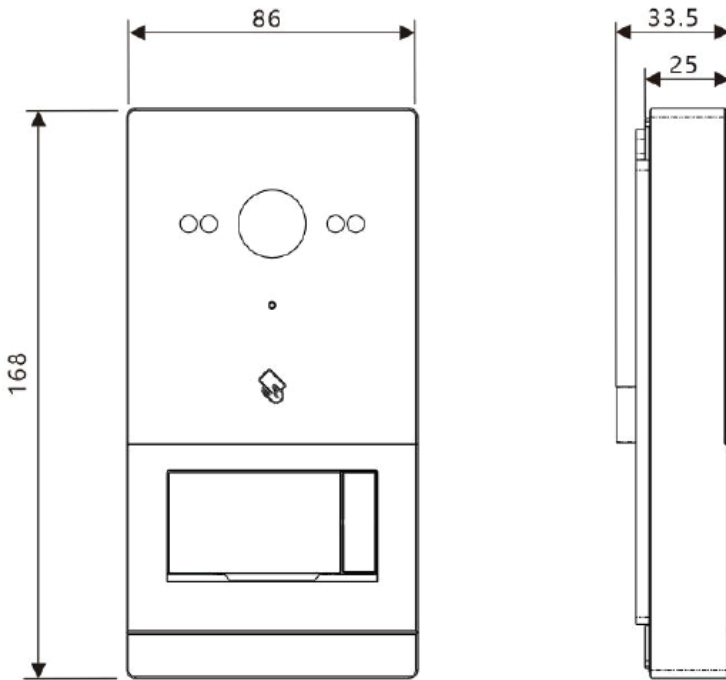

INTERFACE INTRODUCTION

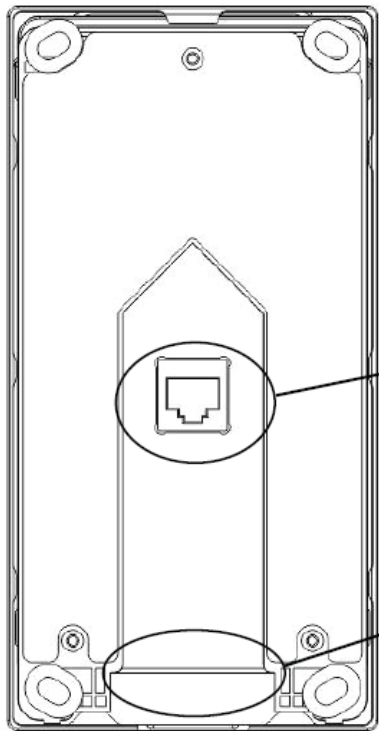

Interface ①

RJ45 Network Interface : Connecting 48V PoE Switch (1236 Communication , 4578Power supply)

Interface ②

+24V GND : Independent power supply interface

NO COM NC : Normal open/close interface

GS GND : Door status detection interface

SW: Indoor unlocking interface

